


Audio Panel

KING

KA 134

Connector

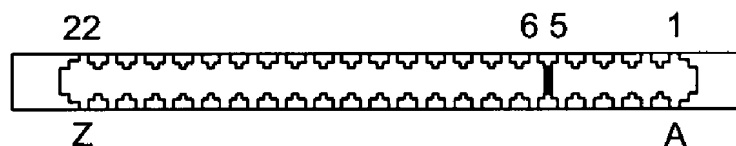

Circuit	Pin #	Notes
13.75 V	N	Note 1
13.75 V / 27.5 V SELECT	1	Note 1
13.75/27.5 VDC POWER INPUT	16	Note 1
27.5 V	14	
8 OHM RAMP HAILER OR 4 OHM PA	13	Note 2
A/C HEADPHONES	W	
ADF AUDIO IN	B	
AIRFRAME GROUND	L	
AUDIO 5 (MARKER)	F	
AUX AUDIO 500 OHM	2	
AUX MIC AUDIO	X	Note 3
AUX MIC KEY	18	
CABIN SPKR	17	
COM 1 & COM 2 SPKR LOAD GRD	3	
COM 1 AUDIO IN	C	
COM 1 MIC AUDIO	19	
COM 1 MIC KEY	U	
COM 1 SPKR LOAD	5	
COM 2 AUDIO IN	D	
COM 2 MIC AUDIO	T	
COM 2 MIC KEY	P	
COM 2 SPKR LOAD	6	
DIMMER	20	Note 4

(Continued)

For familiarization only. Consult the manufacturers current data.

(KA 134 Continued)

DIMMER	21	Note 4
DIMMER	22	Note 4
DIRECT AUDIO 500 OHM	H	
DIRECT AUDIO 500 OHM	J	
DIRECT AUDIO 500 OHM	K	
DME AUDIO IN	A	
INT./HAIL IN	M	Note 3
INT./HAIL SIDETONE	V	Note 2
MIC 1 AUDIO	Z	
MIC 1 KEY	R	
MIC 2 AUDIO	Y	
MIC 2 KEY	S	
NAV 1 AUDIO IN	1	
NAV 2 AUDIO IN	E	
SHIELD GROUND	8	
SHIELD GROUND	9	
SPKR LOAD 16 OHM	4	

Notes

1. For 14 volts, 14 open, N to 15 and 16 to power. For 28 volts, N open, 14 to 15 and 16 to power.
2. V to 13 for P.A. and Ramphailer sidetone.
3. Normal operation, X to M.
4. For 14 volts, 20 and 21 to ground, 22 to Dimmer. For 28 volts, 21 to ground, 22 open, 20 to Dimmer.

For familiarization only. Consult the manufacturers current data.