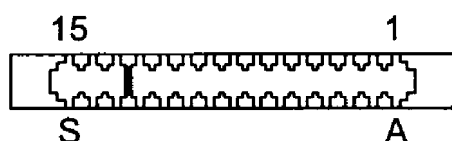


DME**KING****KN 62/62A/64****Connector**

Shifted BCD Code	2X5 Code	Slip Code	Pin #	Notes
M8.....	MA.....	M0.....	12	Note 1
M4.....	ME.....	M1.....	11	Note 1
M2.....	MC.....	M2.....	9	Note 1
M1.....	MD.....	M3.....	8	Note 1
K800.....	KA.....	K0.....	7	Note 1
K400.....	KE.....	K1.....	H	Note 1
K200.....	KC.....	K2.....	4	Note 1
K100.....	KD.....	K3.....	6	Note 1
K50.....	K50.....	K50.....	5	Note 1
Circuit			Pin #	
+11-33 VDC POWER INPUT.....			2	
+11-33 VDC POWER INPUT.....			3	
10 BIT FREQ.....			K	
2X5 CODE SELECT.....			J	Note 2
A/C GROUND.....			1	
A/C GROUND.....			15	
ALTITUDE REQUEST.....			R	
AUDIO HI.....			B	
AUDIO LO.....			A	
BCD CODE SELECT.....			M	Note 2
CLOCK BUS.....			14	

(Continued)

For familiarization only. Consult the manufacturers current data.

(KN 62/62A/64 Continued)

DATA BUS	13	
DME COMMON	C	Note 1
DME REQ	N	
GROUND	S	
N/C.....	10	
N/C.....	E	
N/C.....	F	
RNAV/CHAN REQ	L	
SLIP CODE SELECT	D	Note 2
SUPPRESSION OUT	P	

Notes

1. To control head.
2. Connect D, J, or M to C to match control head DME code type.

For familiarization only. Consult the manufacturers current data.