



NARCO AVIONICS CP 135 and CP 136

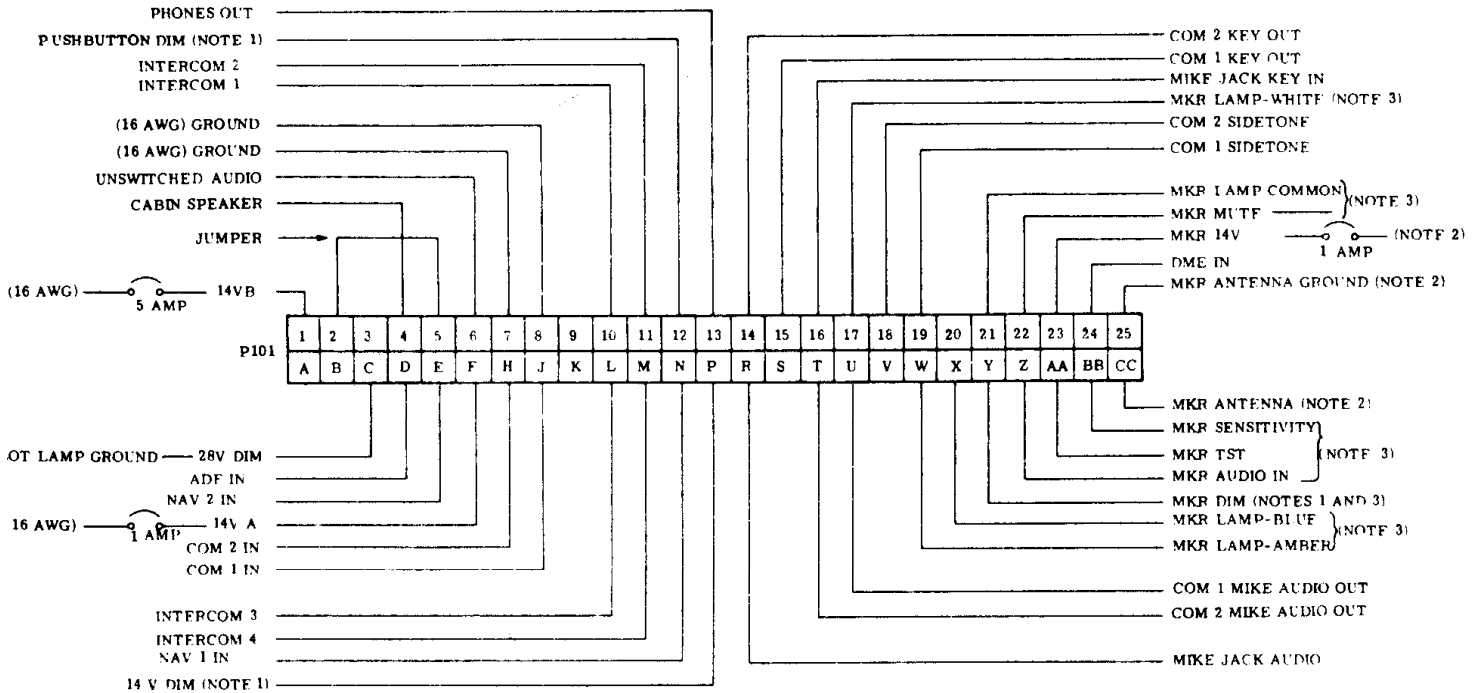

NOTES

1. REFER TO PARAGRAPH 2.5.3 FOR VARIOUS DIMMER CONNECTION METHODS
 2. CONNECTION REQUIRED ONLY WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
 3. CONNECTION NOT REQUIRED WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
- (ALL SIGNAL LEADS 22 AWG UNLESS OTHERWISE NOTED)

FIGURE 2-9. CP 136 14V GENERAL WIRING DIAGRAM

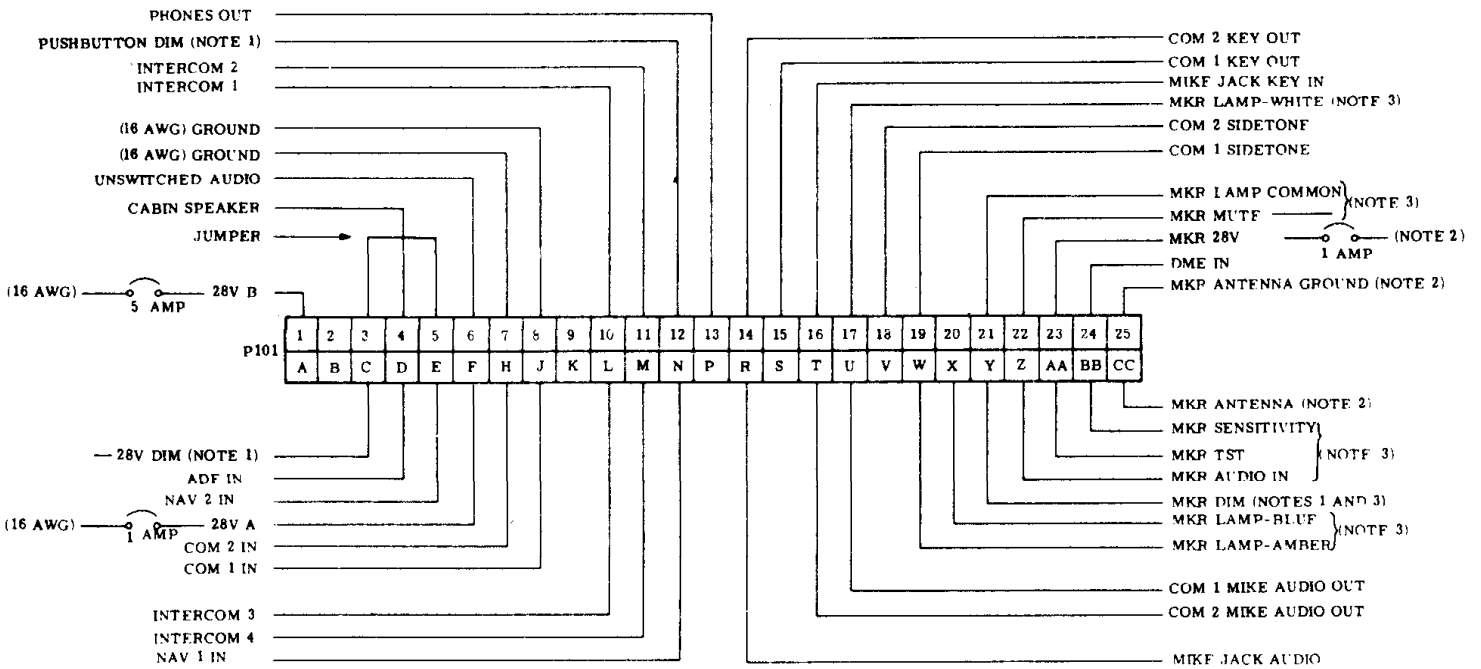

NOTES

1. REFER TO PARAGRAPH 2.5.3 FOR VARIOUS DIMMER CONNECTION METHODS
 2. CONNECTION REQUIRED ONLY WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
 3. CONNECTION NOT REQUIRED WHEN OPTIONAL INTERNAL MARKER BEACON RECEIVER IS INSTALLED
- (ALL SIGNALS LEADS 22 AWG UNLESS OTHERWISE NOTED.)

FIGURE 2-10. CP 136 28V GENERAL WIRING DIAGRAM