

PRELIMINARY

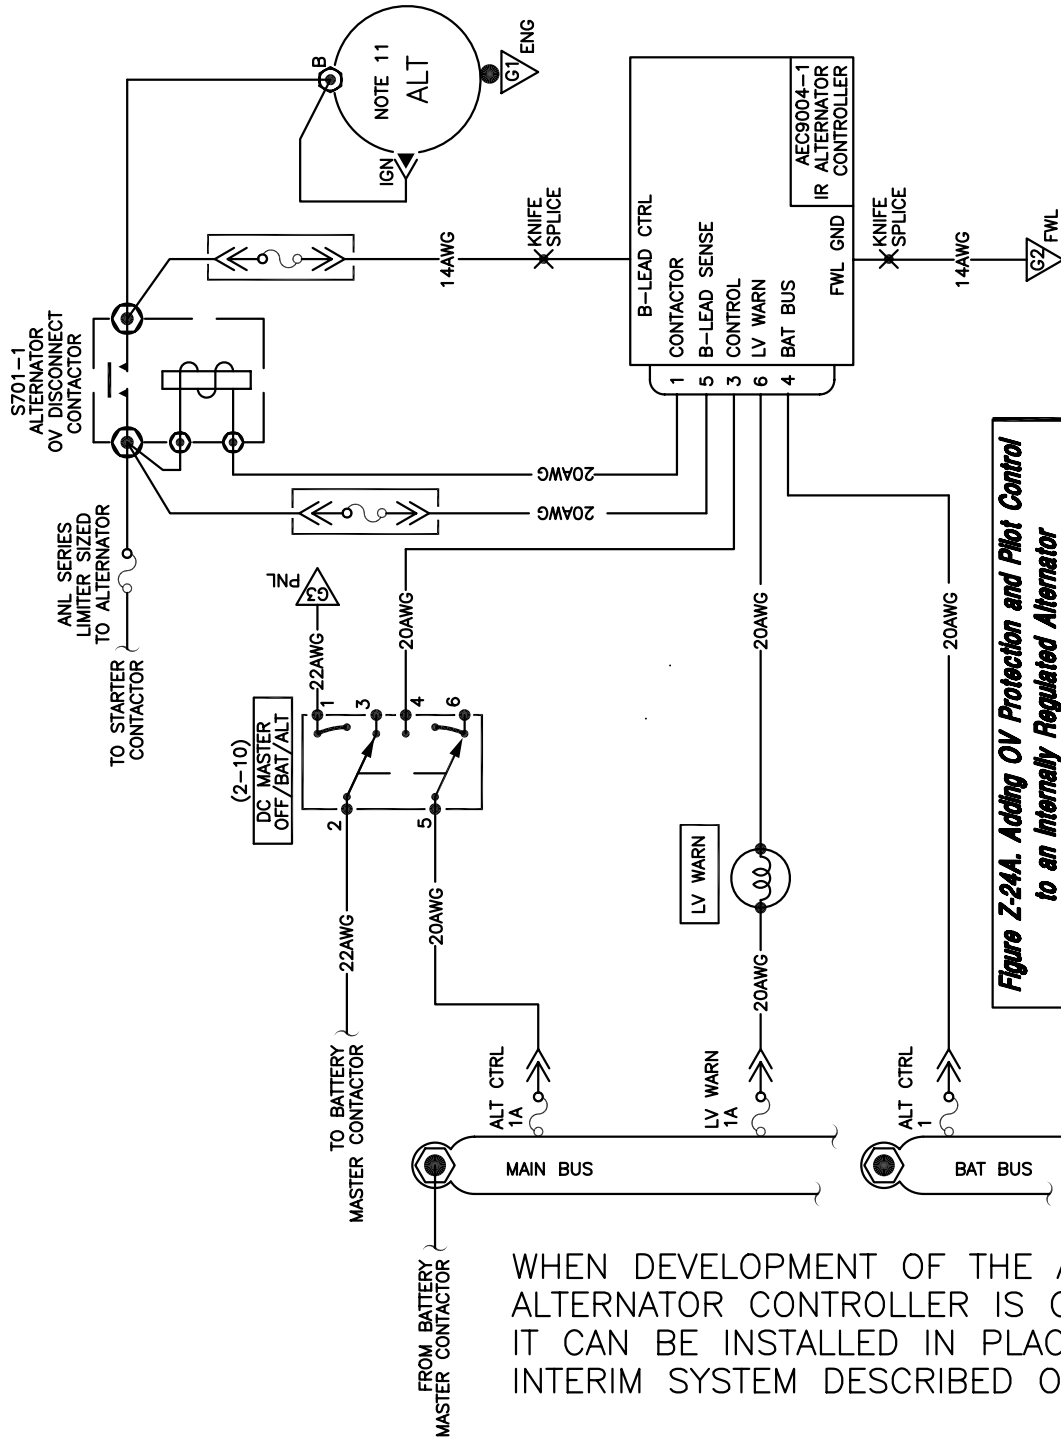


Figure Z-24A. Adding OV Protection and Pilot Control to an Internally Regulated Alternator

WHEN DEVELOPMENT OF THE AEC9004 ALTERNATOR CONTROLLER IS COMPLETE, IT CAN BE INSTALLED IN PLACE OF THE INTERIM SYSTEM DESCRIBED ON PAGE 1.0

THE SAME DISCONNECT RELAY AND CONTROL SWITCH ARE USED. THE OVM-14 MODULE IS DISCARDED. THE AEC9005 CONTROL MODULE ADDED AND A L.V. WARNING LIGHT IS ADDED.

PRELIMINARY